
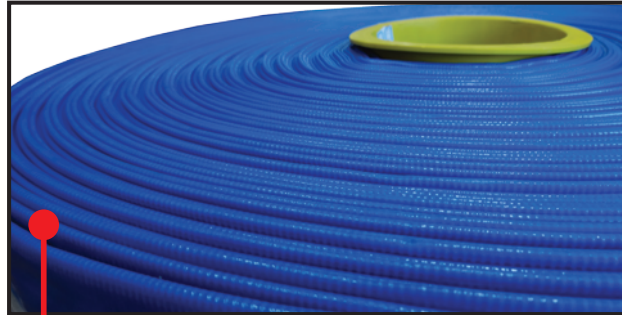


Fujisan

BLUE DISCHARGE HOSE

(Korea Tech)

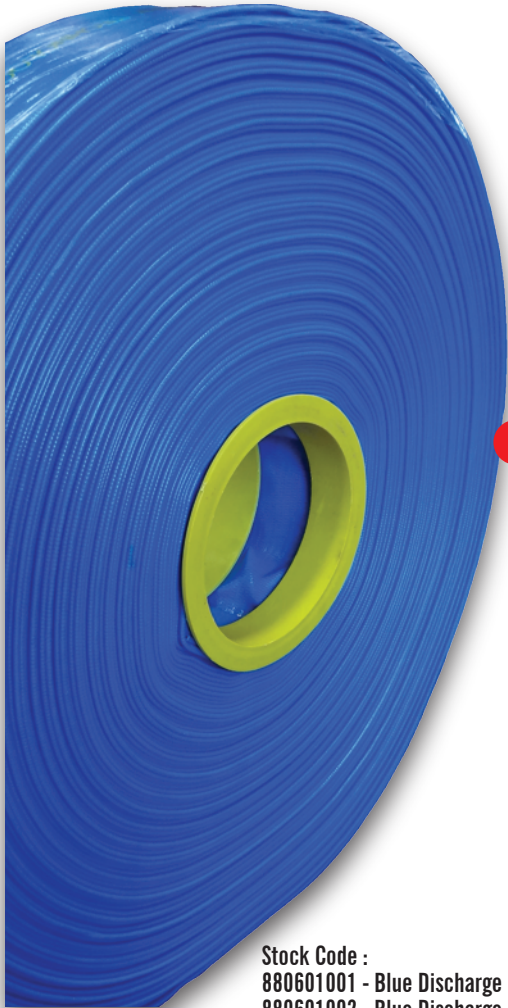

- Polyurethane Blue Discharge lay-flat Hose that resists kinking and twisting. It is designed as a standard duty hose for water discharge in industrial and construction applications, is strong and economical, and rolls up flat for easy storage. Reinforcement includes spiral plies and longitudinal synthetic cords for excellent burst resistance. It resists abrasion and tears, and is usable at higher pressure. Other varieties for higher pressures alternate materials are also available.
- Can come with aluminium coupling fittings with (M) NPSM threads and aluminium/brass swivels in standard lengths. Commonly provided with cam and groove or threaded coupling fittings and hose nozzles.
- Temperature range is -5F to 170F. Pressure drops above 110F.

Stock Code :
880601001 - Blue Discharge HD 2" x 100M Hose (Korea)
880601002 - Blue Discharge HD 3" x 100M Hose (Korea)
880601003 - Blue Discharge HD 4" x 100M Hose (Korea)
880601029 - Blue Discharge HD 6" x 100M Hose (Korea)
880601030 - Blue Discharge HD 8" x 100M Hose (Korea)

Specification:

Inner Dia (in)	Pressure (psi)	Weight (lbs/100ft)	Coil Lengths (m)
2	80	25	100
3	80	36	100
4	70	53	100
6	60	86	100
8	35	130	100



*** Product's specification may subject to change without further notice.
*** Actual product may slightly differ from pictures shown.

ESM436
(19/09/14)