


VITOLI

Super Blower (E-Series)

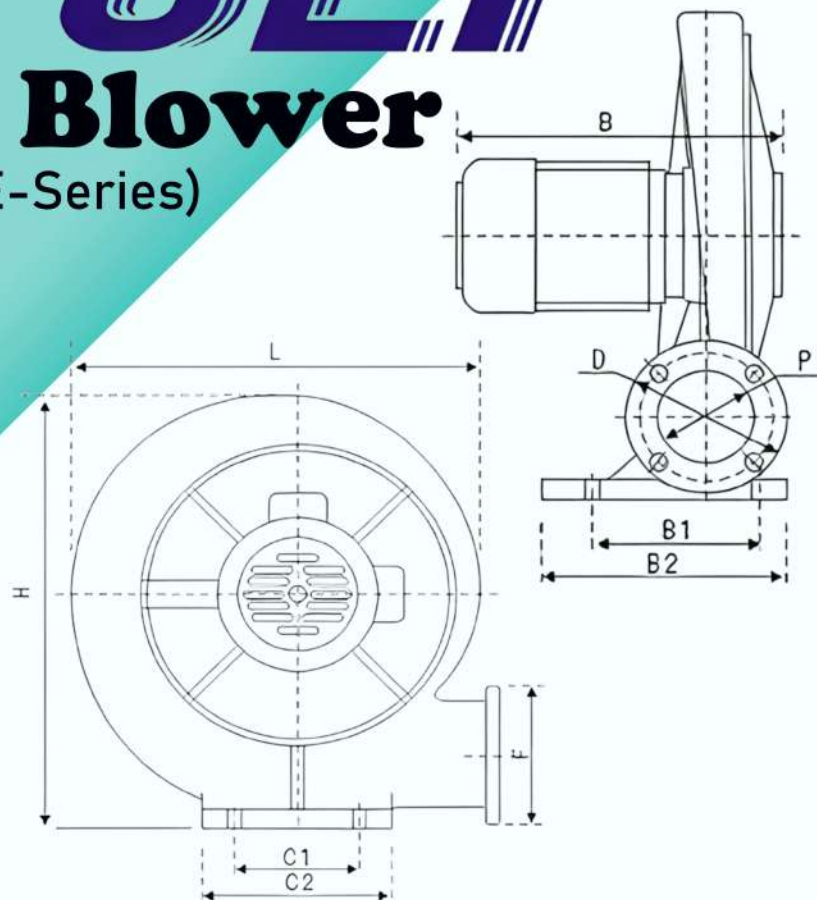

Super Blower is characterized with the merits of low noise, large air volume, high wind pressure, small body, light weight and easy installation. This product is widely used for ventilation in various places to conduit wind conveying of low density service media. Also, it is preferred matching product for plastic printing, textile, kitchen utensils, diesel combustion machinery and diesel oil gastification furnace.

Stock Code	Model	Specification		Power (W)	Phase (PH)	Voltage (V)	Frequency (Hz)	Wind Pressure (Pa)	Blow Rate (min)	Rotation Speed (rpm)	Weight (kg)
		(Inch)	(mm)								
881102006	E1B	2-1/2	65	250	1	230	50	1050	8.5	2800	9
881102007	E1TB	2-1/2	65	250	3	415		1050	8.5		
881102011	E4D	3	75	550	1	230		2000	11.5		16
881102013	E4TD	3	75	550	3	415		2000	11.5		
881102015	E8TD	5	120	2200	3	415		2800	28.0		45
881102019	E9D	4	95	1100	1	230		2300	21.6		29
881102020	E9TD	4	95	1100	3	415		2300	21.6		
881102037	E10TD	6	140	4000	3	415		3280	41.6		58

Model	Power (kw)	Overall Dimension			Air outlet flange size			Base plate and anchor screw hole size			
		L	B	H	D	P	F	C1	C2	B1	B2
E1B	250	340	240	365	95	68	118	67	120	--	150
E4D	550	405	240	435	100	75	125	130	180	125	175
E9D	1100	420	330	460	135	90	155	135	180	170	225
E9TD	1100	420	360	460	135	90	155	135	180	170	225
E8TD	2200	480	430	500	160	120	200	160	220	200	265
E10TD	4000	520	480	600	170	140	210	170	250	240	285

*** Product's specification may subject to change without further notice***

Actual product may slightly different from pictures shown

ESM195-KL (I)
(14/10/2024)